CertainTeed® Rolled Ridge Vent

Filtered Rolled Ridge Vent


Unique Weather Filter Acts as Secondary Level of Defense

Independent research and testing have demonstrated that the best performing ridge vent, in terms of airflow and weather protection, is an externally baffled ridge vent. We've taken that technology and incorporated it into our ridge vents in 28-foot rolls. CertainTeed® Ridge Vents combined with sufficient intake vents, such as CertainTeed Intake Vent, are the most efficient and effective systems you can install.







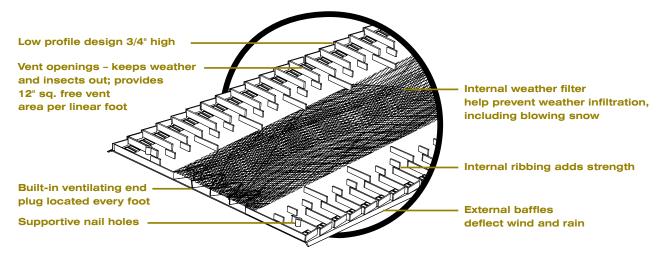

Features

- · Designed with an external baffle to deflect wind and weather over the vent to help protect the attic from rain and snow infiltration. The external baffle creates low pressure over the vent openings to "pull" air from the attic
- Internal weather filter acts s a secondary level of defense.
- · Built-in ventilating weather tight end plugs flexes for different roof pitches and protects roof decking
- 12" sq. net free area per linear foot
- CertainTeed® Ridge Vent fits pitches from 3/12 to 12/12
- Limited Lifetime Warranty and 5-Year SureStart™ Protection
- 28-foot rolls 25 rolls per pallet / Weight: 17.5 lbs. / Part #95986 Model #PPII / Color: Black
- · Two coils of roofing nails are included

Benefits

- Fast and easy Installation internal ribbing adds rigidity to make the vent nail gun friendly. Roll it out and nail it down
- Prevents the premature deterioration of shingles and other roofing materials caused by inadequate ventilation
- · Meets typical roof shingle warranty ventilation requirements







Peak Performer II is Manufactured for CertainTeed Corporation by Air Vent, Inc., Orrick, MO.

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • FOUNDATIONS GYPSUM • CEILINGS • INSULATION • PIPE

www.certainteed.com

http://blog.certainteed.com

CertainTeed Corporation P.O. Box 860 Valley Forge, PA 19482

Professional: 800-233-8990 Consumer: 800-782-8777

© 10/13 CertainTeed Corporation, Printed in the U.S.A. Code No. 20-20-3459

